



## HVT 300-DV

**Failsafe Voltage Monitor  
for shunt monitoring**



### Application

Production as well as utilization of renewable energies is the subject of countless future projects across many industries. A central component of this approach is hydrogen. The electrolysis process required to produce hydrogen can usefully be coupled with the use of renewable energies in many ways to produce green hydrogen in a sustainable manner. Safely monitoring and controlling the current and voltages is an important component of electrolysis plants.

The HVT 300-DV is typically used to make high currents measurable in a safety-oriented manner according to SIL 2 via a shunt resistor. Depending on the application, the measuring range and several limit value alarms can be flexibly set via software.

### Scope of use

Chlorine Alkaline Electrolysis  
PEM Electrolysis  
High Power Rectifiers  
Power Rails

**HVT 300-DV**  
Shunt  
current  
Measurement

**HVT 300-DP**  
Balance  
Voltage  
Measurement

**HVT 300-DX**  
Failsafe  
High Voltage  
Monitor

**HVT 400-DX**  
Failsafe  
High Voltage  
Monitor


## Safety Features

Featuring a safety-by-design approach, the HVT 300-DV provides a wide range of diagnostic functions. In order to create a safety loop, the desired output must be evaluated in conjunction with one of the two diagnostic relays REL3/REL4. This way, two individually configurable safety outputs can be created, for which either the relays REL1/REL2 or the 4...20 mA analog output are available.

Safety Properties	FMEDA
Category	SIL 2
Device type	Type B
HFT	0
SFF	95 %
DC	90 %
Safe failure rate	331 FIT
Safe detected failure rate	0 FIT
Safe undetected failure rate	331 FIT
Dangerous failure rate	362 FIT
Dangerous detected failure rate	325 FIT
Dangerous undetected failure rate	37 FIT

## Main Benefits

- Failsafe voltage monitoring
- Simple software configuration via USB or Modbus RTU
- 0-70 mV DC measurement range
- Redundant architecture
- Robust design with high dielectric strength
- SIL2 according to IEC/EN 61508
- Two individual safety outputs
- LED status: Power, Error, Alarm
- 10-year proof test interval

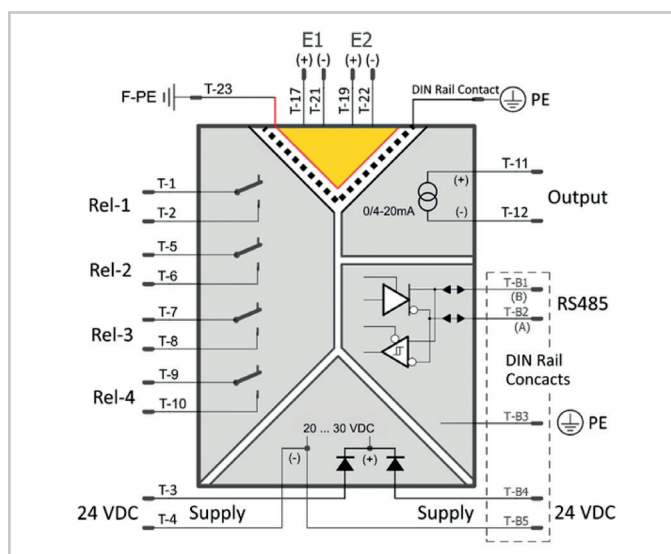

## Technical Data

Certificate	SIL 2 according to IEC 61508
Measurement range	0...70 mV DC
Input Resistance	10 k $\Omega$ each channel
Analog Output	0/4... 20 mA
Load	Max. 500 $\Omega$ at 22 mA
Accuracy	< 0,5 %
Contact outputs	Normally Open
Switching Power	Max. 37,5 VA / Max. 30 W
Switching Voltage	Max. 125 VAC / 30 V DC
Switching Current	Max. 0,3 A AC / 1 A DC
Contact Material	AG Pd + 10 $\mu$ Au
Status LEDs	Power: Green Error / SIL Alarm: Red REL1/REL2: Yellow
USB Interface	USB 2.0
RS485 Interface	Half duplex, no scheduling
Baud rate	9600 bps
Device Address	1-248
Supply	24 VDC (20...30 VDC)
Power Consumption	Max. 1,9 W
Temperature	-10° C...+60° C
Storage / Transport	-20° C...+70° C
Perm. Humidity	10 %...95 % r.H no cond.
Max. operating Altitude	<2000 m above mean sea level
Temperature Coefficient	<0,01 %/K (max.) <0,005 %/K (typical)
Galvanic isolation	4,3 kV AC test voltage
Overvoltage category	CAT II: 1000 V Pollution Degree 2
PCB Material	FR4
Housing Material	Polyamide
Protection Class	IP20
Flammability UL94	V0
Mounting type	35 mm DIN rail

